



# C A B U C H O N<sup>®</sup>

## B A T H *f*o *r*m *s*

### ELYSIA FREE-STANDING BATH

This bath is supplied with only waste & overflow holes drilled. Holes for spouts, taps and handshowers can be located anywhere on the deck rim. Wall or free standing taps are also an option. The only rule is good plumbing.

The bath stands on four screw adjustable feet bonded to the bottom of the bath. Note that underfloor access is required for installation. Installation instructions are overleaf.


All Cabuchon products are registered designs covered by copyright and the Company, being committed to continuous innovation and improvement, reserves the right to change specifications without notice. Tolerances are + or -3mm.

#### NORMAL WATER REQUIREMENT

248 Litres, 56 Imperial Gallons, 67 US Gallons

KEY TO SIZES: ■ Millimetres □ Inches to nearest 1/4"

*Rear rim can have tap deck as shown, or be plain. There is a 450mm long flat area at centre of the tap deck.*

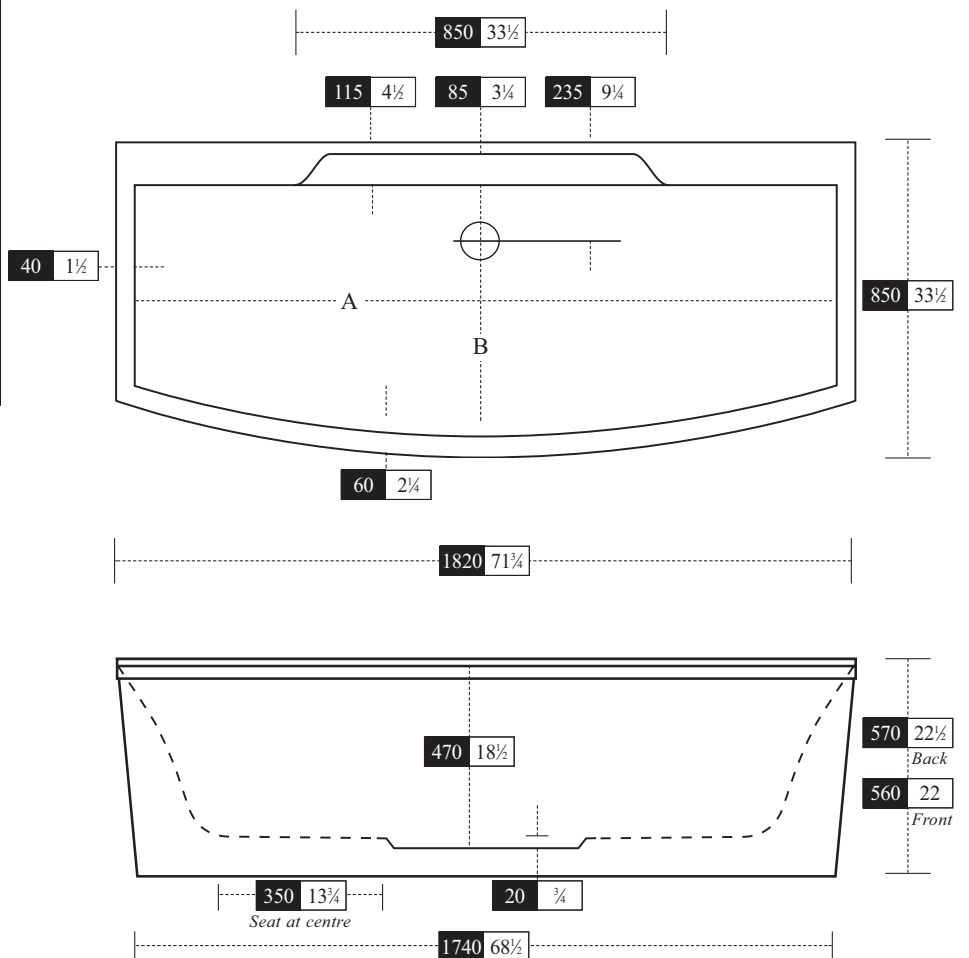

	A	B
Top	1600	675
	63	26 1/2
Bottom	1250	555
	49	22